



VT1100 TURBO-MAX[®]

The industry-leading Turbo-Max has been reimagined for even greater versatility and performance. Introducing the VT1100 Turbo-Max, with new features and options, including a double basket for the smoothest finish, chopper reels to handle tough residue conditions, and

a choice of blades to better match your application. Adjustable gangs deliver cross-season flexibility for optimum residue management and seedbed preparation, making the VT1100 the *true* vertical tillage solution for producers who take soil management seriously.



3-SECTION MODELS
VT1100-20, VT1100-25,
VT1100-30, VT1100-35

5-SECTION MODEL
VT1100-40

AVAILABLE WITH



FEATURES & BENEFITS



2 Sets of gangs

HYDRAULICALLY-ADJUSTABLE GANG ANGLE

One of the most unique features of the original Turbo-Max was its ability to angle the gangs from 0° to 6°. This popular feature is also key to the new VT1100 Turbo-Max.

All models are equipped with hydraulic cylinders to make gang angle changes on-the-go. Heavy, ductile cast spools keep weight in the gangs, ensuring reliability of the C-shanks and bearings.

0 DEGREE GANG ANGLE



6 DEGREE GANG ANGLE




NEW FINISHING ATTACHMENTS

New options include a chopper reel that extends versatility in difficult, high-residue conditions and a double basket attachment with either flat or round bars for a customized field finish. The single basket attachment is still available, but is now offered with a choice of flat or round bars to best match your field conditions and soil types.



NEW FRAME DESIGN

The frame on the VT1100 Turbo-Max has been redesigned to support new finishing attachment options. The updated frame also accommodates heavier transport axles and tires.

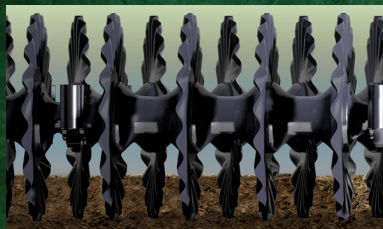

TRUE VERTICAL TILLAGE MACHINE

With Turbo blades spaced 7½" apart, the VT1100 Turbo-Max provides true vertical cutting without the shearing caused by concave blades. Offset front and rear gangs achieve an effective residue cutting width of 3¾" when running at 0°.



IMPLEMENT COMMAND® (optional)

Implement Command allows the operator to set, adjust, and monitor the VT1100 Turbo-Max on-the-go and in real time from the tractor cab.

OPTIONS (see website for complete list of features & options)



TURBO-SEEDER™ FOR COVER CROPS

Till the soil, size residue, and seed cover crops in one pass.



CHOPPER REELS

Replace rolling spike harrows in viney conditions or to pin residue to the ground.



*DOUBLE ROLLING BASKET

Achieves a seedbed-ready, high-quality finish.

*Features adjustable hydraulic down pressure.

*SINGLE ROLLING BASKET

Provides a firm field finish.

VT1100 Turbo-Max®	Tillage Width	Transport Width	Transport Height	Engine H.P. Required
VT1100-20	20'	15' 7"	9' 4"	180+
VT1100-25	25'	15' 7"	12' 4"	230+
VT1100-30	30'	15' 7"	14' 4"	285+
VT1100-35	35'	17'	14' 7"	345+
VT1100-40	40'	17' 7"	14' 4"	380+

See GreatPlainsAg.com for complete specifications. Specifications are subject to change without prior notification. Images may not depict current or standard production models.



20" & **NEW 22"**
TURBO BLADES
AVAILABLE

ADDITIONAL STANDARD FEATURES

- Hydraulic fore and aft
- Heavy-duty, maintenance-free seven-lip seal bearings
- Hydraulic weight transfer
- Wing flex: 10° down, unlimited up
- High-tensile tubing
- Walking tandem on center transport
- Dual wing tires (VT1100-25 and larger)
- 9.5L x 15 8-ply (wing) gauge wheels
- Constant level hitch
- Multiple hitch options
- Heavy-duty jack
- Extra-heavy-duty C-shanks
- Nickel chrome cylinder rods
- Color-coded hydraulic hoses
- LED safety lighting

GREATPLAINSAG.COM